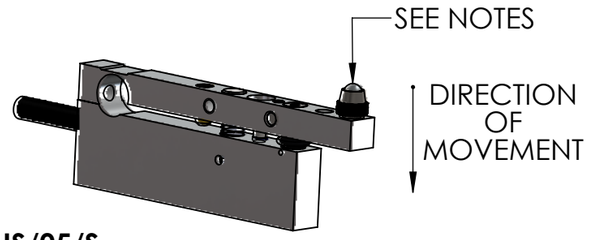

DUS/05/S

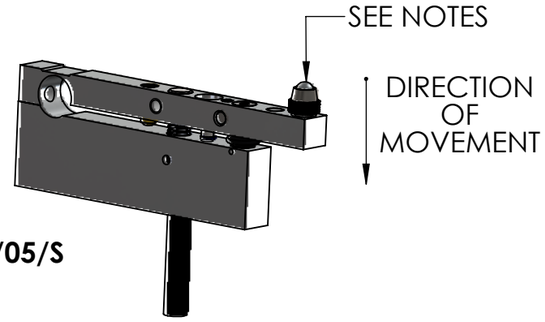

DUSB/05/S

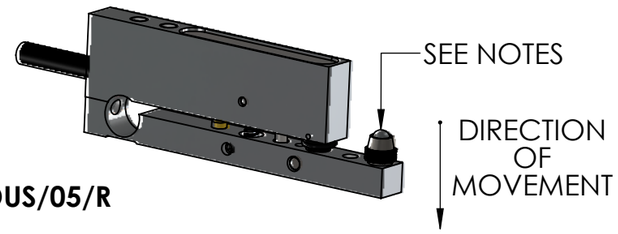

DUS/05/R

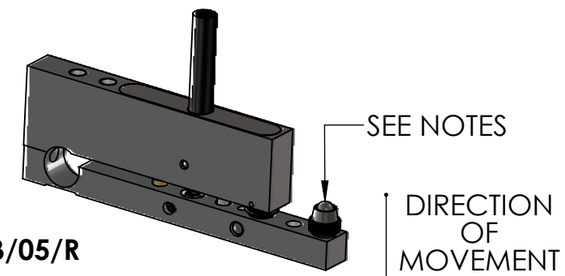

DUSB/05/R

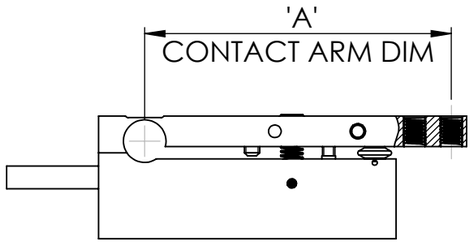

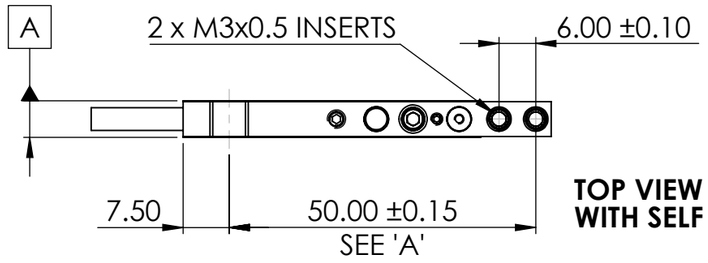

TOP VIEW DUS/05/S
WITH SELF LOCKING INSERTS

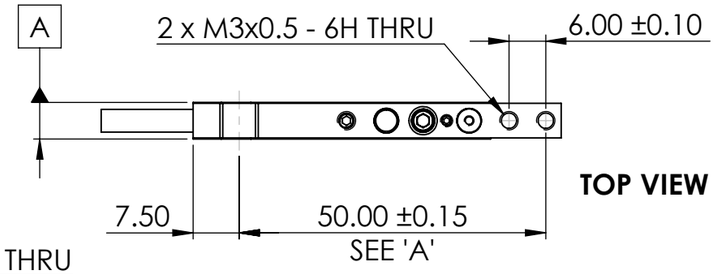

TOP VIEW DUS/05/S

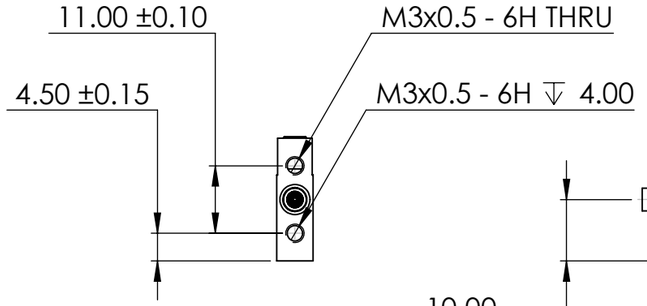

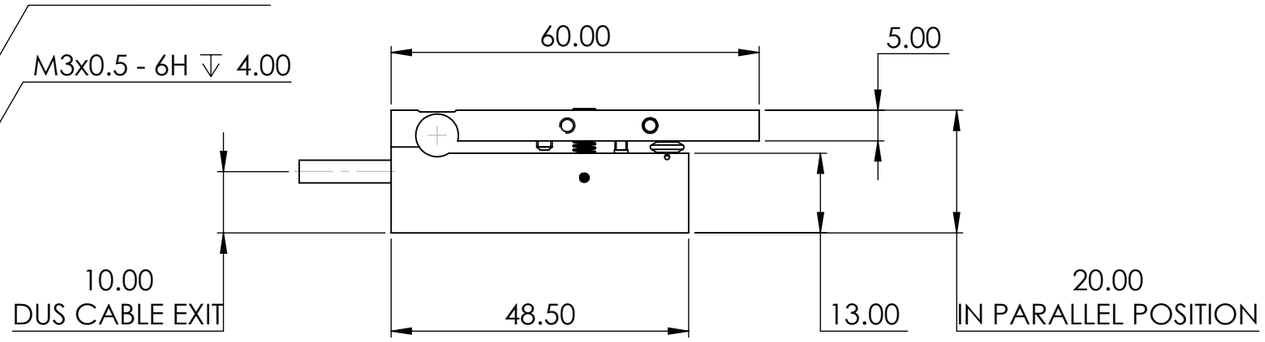

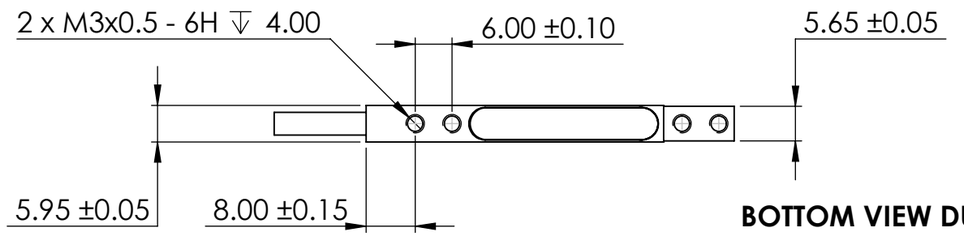

BOTTOM VIEW DUS/05/S

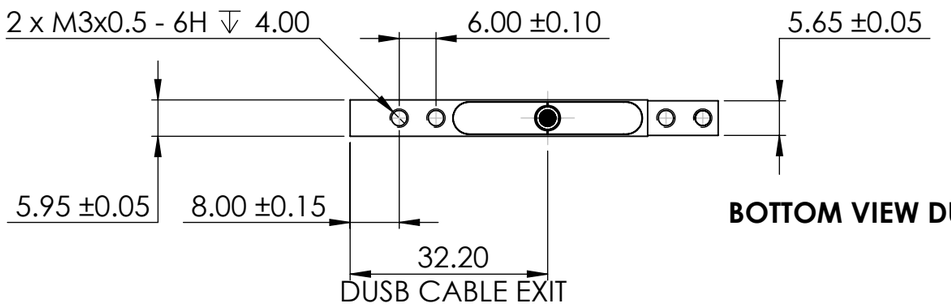

BOTTOM VIEW DUSB/05/S

NOTES:-

1. PRODUCT DESIGNATION :
   - DUS/05/S - SINGLE LEAF FLEXURE WITH STANDARD (COMPRESSED) SPRING, 0 TO 0.5mm FULL CALIBRATION STROKE.
   - DUS/05/R - SINGLE LEAF FLEXURE WITH REVERSED (TENSION) SPRING, 0 TO 0.5mm FULL CALIBRATION STROKE.
   - DUSB - SINGLE LEAF FLEXURE WITH CABLE EXIT BOTTOM.
2. BALL TIP SHOWN FOR REFERENCE PURPOSE ONLY.
3. ALL MOUNTING HOLES ARE ⌯ | 0.05 | A |.

Solartron Metrology STEYNING WAY • BOGNOR REGIS • SUSSEX • ENGLANG • PO22 9ST	DRAWING NUMBER 540002-109	TITLE SINGLE LEAF FLEXURE DIGITAL	E.D.C.R.	22647
			ISSUE	2

SOLARTRON PURSUES A POLICY OF CONTINUOUS DEVELOPMENT. SPECIFICATIONS IN THIS DOCUMENT MAY THEREFORE BE CHANGED WITHOUT NOTICE. DIMENSIONS ARE NOMINAL AND SPECIFIED IN MILLIMETRES